

PRODUCT DATASHEET

Recessed Panel light HYD-116E-7W 6500K



Application

- Office
- Kitchen
- · Rest room
- Corridor
- Shop

Benefits

- Flicker free.
- The light is soft and bright
- Drive stable, safe and reliable
- High light transmission mask to ensure uniform light

Features

- Warranty 5 years
- Efficient and durable
- Easy and quick installation
- Die-cast aluminum body for better heat dissipation, anti-corrosion





Electrical Data

Nominal wattage (W)	7W
Nominal Voltage (V)	220
Mains Frequency (Hz)	50
Nominal Current (mA)	59
Power Factor λ	0.5
Operating mode	DOB

Photometrical data

Luminous flux ±10% (lm)	511 lm	
Luminous efficacy	76 lm/w	
Color temperature	6500K	
Light color (designation)	Cold White	
Color rendering index Ra	≥80	
Standard deviation of color matching	≤5 SDCM	
Luminous intensity/cd	206	
Flickering	Flicker free	
Beam angle	105 °	

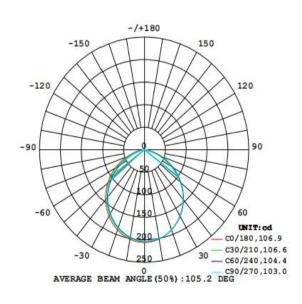

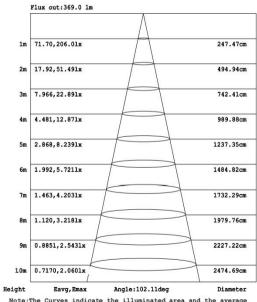


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

IES



Dimensions & Weight

Diameter (mm)	105
Height (mm)	46
Product weight (g)	118

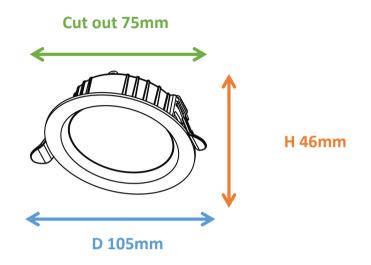

Material & Colors

Product color	All White	
Housing color	White	
Body material	Aluminum	
Cover material	PC	
Mercury content	0.0 mg	

Application & Mounting

Aughtent town auctions non-	-20°C~+45 °C		
Ambient temperature range	-20 C~+45 C		
Temperature range at storage	-25°C~+60 °C		
Type of connection	Screwless terminal		
Type of protection	IP20		
Dimmable	No		
Mounting type	Recesse mounted		
Mounting location	Ceiling		
Application environment	Indoor		
Cut size (mm)	75		
LED module replaceable	Not replaceable		
With light source	Yes		




Certificates & Lifespan


Life (h)	50,000	
Certificates	CB LVD EMC RoHS	
Standards	ISO9001:2015	


Logistical Data


Product code	Dimensions	Pcs/	G.W.	Volume
	(L*W*H)	carton	kg	CBM
HYD-116E-7W	57.5*24.5*27.5 cm	50		0.03874

Installation Method

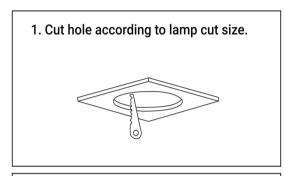

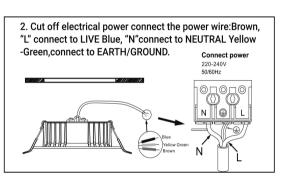

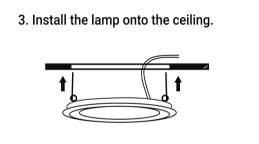

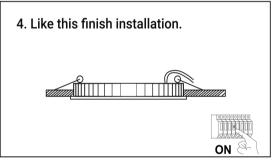

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release